

SURFACE-EDGE

CONTRACT FLOORING

WWW.SURFACE-EDGE.COM



N E X T W O O D X L

WATERPROOF HARDWOOD

SURFACE ■ EDGE

CONTRACT FLOORING

WHO WE ARE

- An elite contract furnishings group focused on innovative solutions for multi-family, builder, senior living, retail, corporate and hospitality projects.
- Amongst North America's largest flooring buyers with extensive global supply chain expertise.
- Exclusive North American representation for over a dozen high integrity, offshore flooring factories.
- Diverse product line focused on emerging trends and supported by advantages in price, style, quality and supply chain efficiency.

Multi Family

Senior Living

Corporate

Hospitality

Retail



NEXT WOOD XL

WATERPROOF HARDWOOD



SPECIFICATIONS

WWW.SURFACE-EDGE.COM

Collection	Next Wood XL
Size	6.5" x 72" (Random Length)
Construction	Waterproof Wood (SPC core)
Thickness	6.5mm
Surface Treatment	Thermal Treated
Wear Layer	1.2mm Sliced
Embossing	Real Wood
Edge Detail	4 sided bevel
Finish	PowerShield™ with Aluminum Oxide

Emissions	FloorScore
Installation Type	Locking (Floating)
Locking System	Valinge
Attached Pad	Yes
Warranty	Lifetime Limited Residential 10 Year Limited LT Commercial
Sqft per Ctn	20
Sqft per Pallet	66 Ctns = 1,320
Sqft per Container	15 Pallets = 19,800



GreenGuard Gold conforms with the strictest VOC and indoor air quality requirements.



NO ACCLIMATION

Can be installed as soon as the flooring arrives on site which significantly reduces costs and allows for faster turnarounds.



WATERPROOF

Real wood flooring that warrants up to 96 hours of water protection from spills.



DENT RESISTANT

The high density SPC core increases the dent resistance of the real wood veneer to over 2 X harder than solid oak flooring.



SOUND REDUCTION

Attached IXPE pad reduces sound transmission within a room as well as to the room below.



INCREASED STABILITY


Waterproof Wood structure reduces the effects of changes in temperature and humidity. Results in less cupping, gapping, and surface cracking.

PERFORMANCE TESTING

ASTM E90-2009	STC	61	
ASTM E492-09	IIC	52	
ISO 4918:2009	Caster Chair (25000 Rev.)		Pass
ASTM D4060	Taber Abrasion	Initial Final	1500 Rev. 2500 Rev.
ASTM D2394	Coefficient Of Friction (COF)		Dry 0.62 Wet 0.60
ASTM D5582	Formaldehyde		<0.025ppm
Phthalates	ND (Not Detected)		
ASTM E648	Critical Radiant Flux		Class1
ASTM E662	Smoke Density-Flaming Smoke Density-Non-Flaming		Passed Passed
NALFA 3.5	Large ball impact		Class 4

WATERPROOF HARDWOOD LAYERS

WWW.SURFACE-EDGE.COM

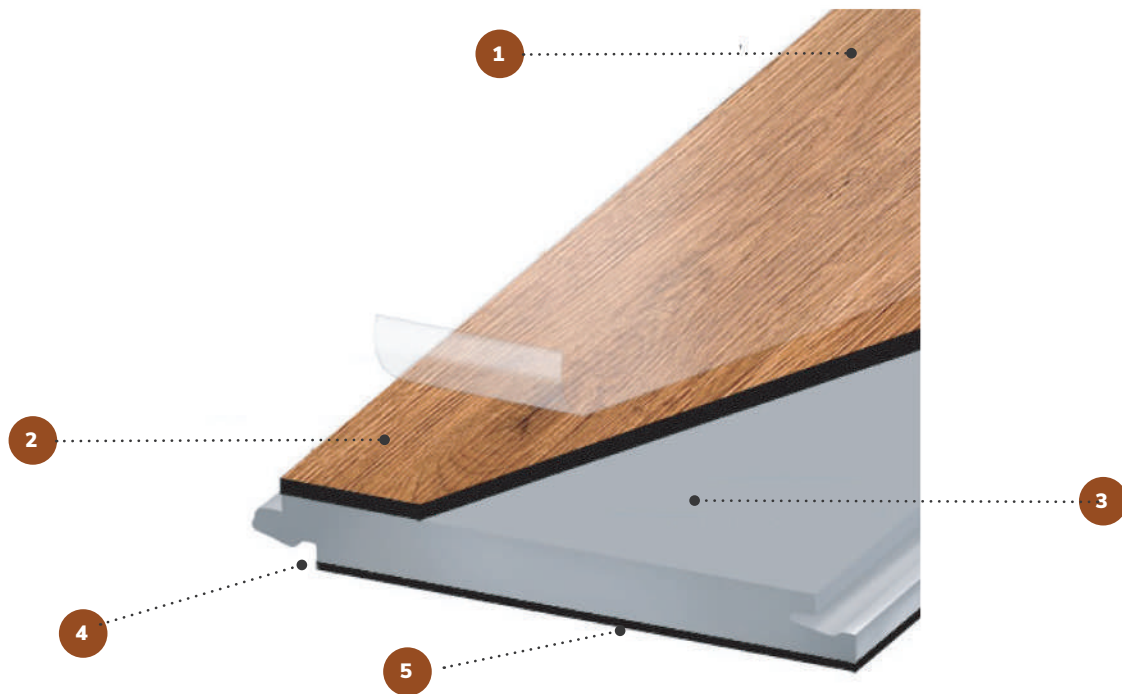

1

PROTECTIVE COATING

Durable and scratch resistant PowerShield Finish seals and protects wood surfaces from spills and stains

2

REAL WOOD VENEER

Hardwood veneer eliminates pattern repeats found in vinyl and laminate flooring

3

SPC CORE

Strong, Rigid, and 100% Waterproof SPC core installs without acclimation

4

LOCKING SYSTEM

Planks lock together and require no glue or nails for installation

5

SOUND LAYER

Attached foam under cushion decreases sound reflection and transmission